

# PS1X Series

**Patent product , counterfeiting not allowed**

OIML Certificate No.: R76/2006-NL1-12.28  
Patent number of Vibration trigger design: ZL 2009 2 0177204.7  
Multi customers accumulating patent No.: ZL 2012 2 0205564.5  
Membrane Key Patent No.: ZL 01 2 03361.8  
Insect-proof Patent No.: ZL 03 2 26288.4

price computing scale/  
communication price computing scale



## MODEL EXPLICATION


### PS1X xx XXXX

- |                                    |                               |                                                                                                                                                                                |
|------------------------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Null: without pole<br>P: with pole | 15: 6kg/15kg<br>30: 15kg/30kg | Feature code:<br>P: Anti-cheating<br>Platter types<br>S: stainless steel platter<br>T: plastic platter (recommended)<br>Battery models<br>L: lithium battery<br>D: dry battery |
|------------------------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
- A: Basic type, 3 lines 8 digits, with multi-customers function. No backlight
  - B: Basic type with adjustable backlight & multi-customers function, 3 lines 8 digits
  - C: Communication type, 3 lines 8 digits, with multi-customers function & backlight & RS232. Support dry battery.
  - D: Communication type with 35\*2 hotkeys, backlight & RS232, 3 lines 8 digits. Support dry battery.
  - E: With 8 memorial PLU keys and adjustable backlight, 3 lines 8 digits. No multi-customers function.
  - F: Basic type with adjustable backlight & 35\*2 hotkeys & 3 lines 8 digits. No multi-customers function.
  - G: Type E with old silicone keyboard.
  - H: Type B+ hotkeys



Patent insect-proof design

With display pole  
(optional)



waterproof grade IP53



## Unique functions

- ※ Unique super power-saving design in the world, only 3 D alkaline batteries can drive the scale 2 years (8 hours each day, 30 times each hour, 10 seconds each time) .
- ※ Unique multi customers accumulating function (patent) with five accumulating keys, able to accumulate for five customers at the same time. One piece of scale could equal to five scales.
- ※ Insect-proof design (patent), able to prevent the defect caused by bugs entering into the machine, reducing 80% failure.
- ※ Patent vibration-detected-circuit design, most of the time in super power saving stand-by status(21uA) will enter into working status by any loading(backlight degree 1~7, default 1 degree, 5.5mA).
- ※ Lower cost: 3 D type dry batteries can drive the scale for 2-3 years. The life of traditional lead batteries is only 2 years and need professional people to replace, expensive and often break down.
- ※ The first one produces lithium battery charging type.
- ※ High-sensitive light touch keyboard and super life-long carbon membrane.
- ※ Daily total turnover check function.
- ※ Patent hot keypad (PS1XD with 35\*2 PLU keyboard), not only can be printed to put PLU sheet underneath, but also can be used as unit price default keys, improve sale efficiency.
- ※ The most feature-rich in redisplay function, able to redisplay the transaction process which including unit price, piece weight, total price, price unit and serial number, clearer than other scales in market.
- ※ Patent tempered glass platter, practical, good looking and easy to clean. (Also have the type with stainless steel platter or plastic platter).
- ※ Super 3-line 8 characters LCD display, able to display weight, unit price and total price in the same screen.
- ※ Well-designed combined function keys, convenience and easy to operate.
- ※ The type with communication port (PS1XC/PS1XD), able to connect with POS or ECR. Optional RS232 dongle to realize wireless communication.

## Excellent functions

- ※ 8 memory unit price key, convenient to operate when busy.
- ※ High anti-interference. The radiation intensity to radio frequency electromagnetic fields up to 10v/m.
- ※ Auto-power saving design, will enter into the stand-by status automatically without any operation (user-defined 4~200 seconds at will, 200 seconds won't enter into auto-power saving status) only consuming 21uA., able to be awake by any loading or operation due to the inner shaking mechanism. (Please tap the platter when there is no response in loading).
- ※ Support backlight (PS1XB/PS1XC/PS1XD) shift function by pressing the backlight key for 1.5 seconds, able to save electric power by turning off backlight in bright area and extend service life of dry battery.
- ※ CHG function, assist users to change notes accuracy.
- ※ Store 70PLU(PS1XD).
- ※ Support price-lock function, suitable to sell weighing commodity of same price.
- ※ Price unit (500g) or kilogram (KG) can be set, suitable to traditional market.
- ※ Two optional ranges: 15kg (e=2g/5g) or 30kg (e=5g/10g).



Watch WeChat  
Aclas408


**ACLAS**<sup>®</sup>  
[www.aclas.tw](http://www.aclas.tw)

## Specifications

| Model                   | PS1XA                                                                                       | PS1XB/PS1XE    | PS1XF                          | PS1XC                        | PS1XD                                   |
|-------------------------|---------------------------------------------------------------------------------------------|----------------|--------------------------------|------------------------------|-----------------------------------------|
| Basic features          | without backlight                                                                           | with backlight | with 35*2 hot keys & backlight | with backlight & RS232       | with 35*2 hot keys & RS232<br>backlight |
| Communication Interface | No                                                                                          |                |                                | RS232 (support power supply) |                                         |
| Inner resolution        | 1/30000                                                                                     |                |                                |                              |                                         |
| Weight range            | 0-15-30Kg                                                                                   |                |                                |                              |                                         |
| power                   | 3pcs D type dry batteries                                                                   |                |                                | 3pcs AA dry batteries        |                                         |
| Battery Life            | approximately 2 years(8 hours each day, 30 times each hour, 10 seconds each time)           |                |                                |                              |                                         |
| Power consumption       | soft tuning off < 5 $\mu$ A ,stand by: 21 $\mu$ A ,Working :4.6mA; backlight on :<5.5mA     |                |                                |                              |                                         |
| Working temperature     | 0℃~40℃                                                                                      |                |                                |                              |                                         |
| Working humidity        | 5%~85%R.H.                                                                                  |                |                                |                              |                                         |
| Over loading warning    | Over 100.015%                                                                               |                |                                |                              |                                         |
| Over loading protection | Over 120%                                                                                   |                |                                |                              |                                         |
| Weight                  | Net weight: 2kg ; gross weight: 3.5kg                                                       |                |                                |                              |                                         |
| Platter size            | glass platter: 327.4*227.4mm; Stainless steel platter: 330*230mm; plastic platter:230*330mm |                |                                |                              |                                         |

Note : Functions and appearance are subject to change without notice. Please refer to practicality.

## Dimensions

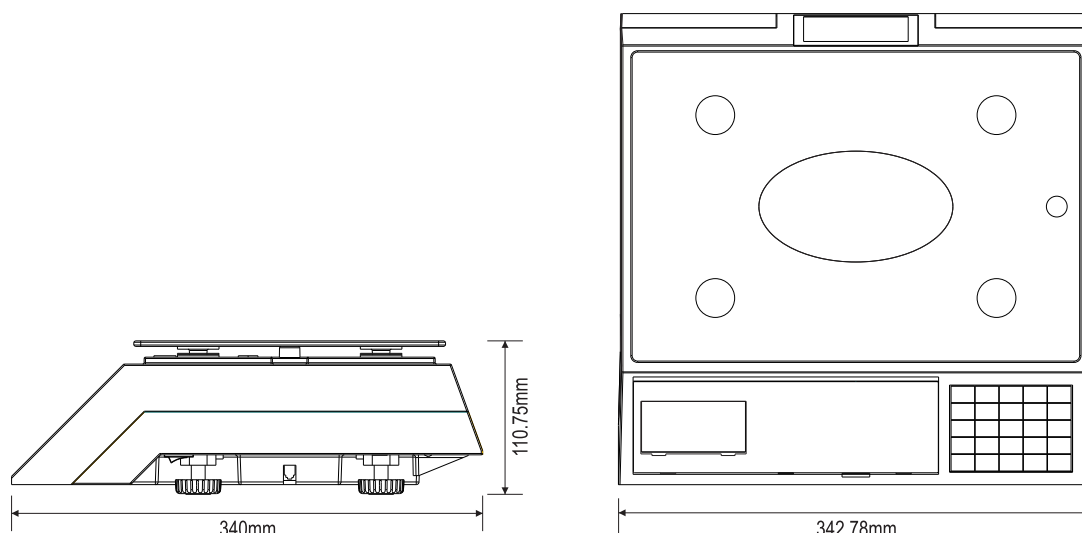

## Wireless communication scale

